



FRONT VIEW

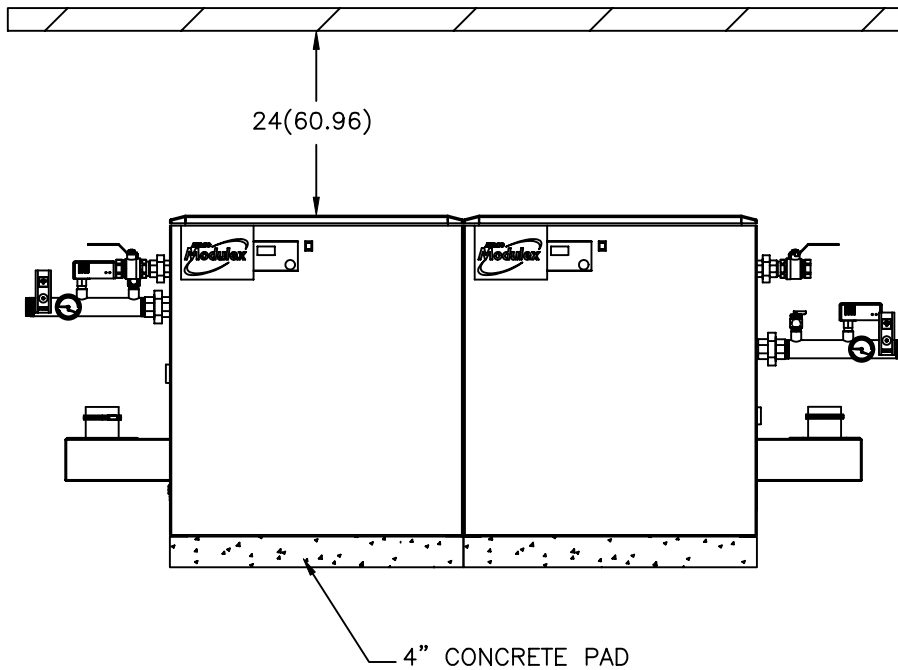

TOP VIEW

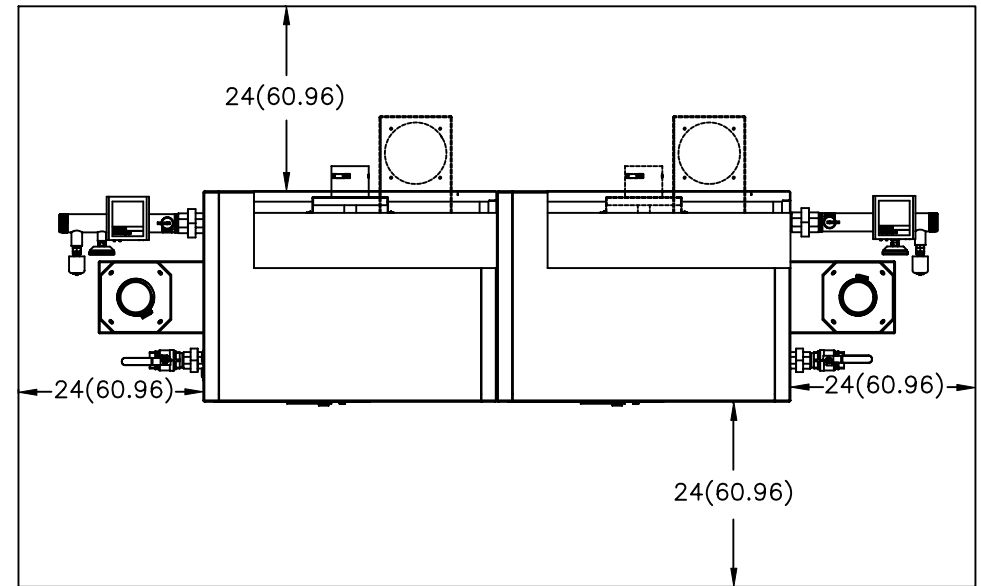

MINIMUM INSTALLATION CLEARANCES TO ADJACENT CONSTRUCTION

SIDES	24(60.96)*
FRONT	24(60.96)
REAR	24(60.96)
TOP	24(60.96)

- \* THE INNER SIDE PANELS MUST BE REMOVED FROM BOTH UNITS FOR ZERO SIDE CLEARANCE INSTALLATIONS
- \* THE ZERO SIDE CLEARANCE OPTION CAN ONLY BE EMPLOYED IN TWO UNIT SETS

NOTES:

- 1) ALL DIMENSIONS SHOWN ARE IN INCHES (CENTIMETERS)
- 2) STANDARD LOCATIONS FOR COMPONENTS/CONNECTIONS ARE ON THE RIGHT HAND SIDE. DOTTED LINES ARE ALTERNATE LOCATIONS. FOR ZERO SIDE CLEARANCE INSTALLATIONS, FOR THE UNIT ON THE LEFT, USE LEFT HAND SIDE CONNECTIONS EXCEPT FOR THE SEALED COMBUSTION.

*AERCO* INTERNATIONAL, INC.  
NORTHVALE, NJ 07647

MODULEX GAS FIRED BOILER  
ZERO SIDE CLEARANCES INSTALLATION

DWN.BY CZ DATE 091206  
SCALE \_\_\_\_\_ SIZE A  
CHKD. \_\_\_\_\_ APPD. \_\_\_\_\_  
REV. DATE \_\_\_\_\_

SD-A-696

REV  
A