


PUMP PART NUMBER: 99125

CIRCUIT SETTER PART NUMBER: 92081-2.5

SPECIFICATIONS - B&G PL-130/2"  
INLINE, PERMANENTLY LUBRICATED  
FLANGE SIZE: 2"  
PUMP BODY: CAST IRON  
HORSEPOWER: 2/5  
VOLTAGE: 115V/1PH/60HZ  
FLA: 4.8 A  
MAX. OPERATING TEMPERATURE: 225°F  
MAX. WORKING PRESSURE: 150 PSI  
OVERALL DIMENSION: 10-3/4"H X 5-1/8"D  
FLANGE FACE-TO-FACE: 8-1/2"

SPECIFICATIONS  
CONNECTION SIZE: 2-1/2" NPT  
BODY: BRASS  
MAX OPERATING TEMP.: 250°F  
MAX. WORKING PRESSURE: 300 PSI  
OVERALL DIMENSION:  
6.00"L X 4.83"H X 4.51"D

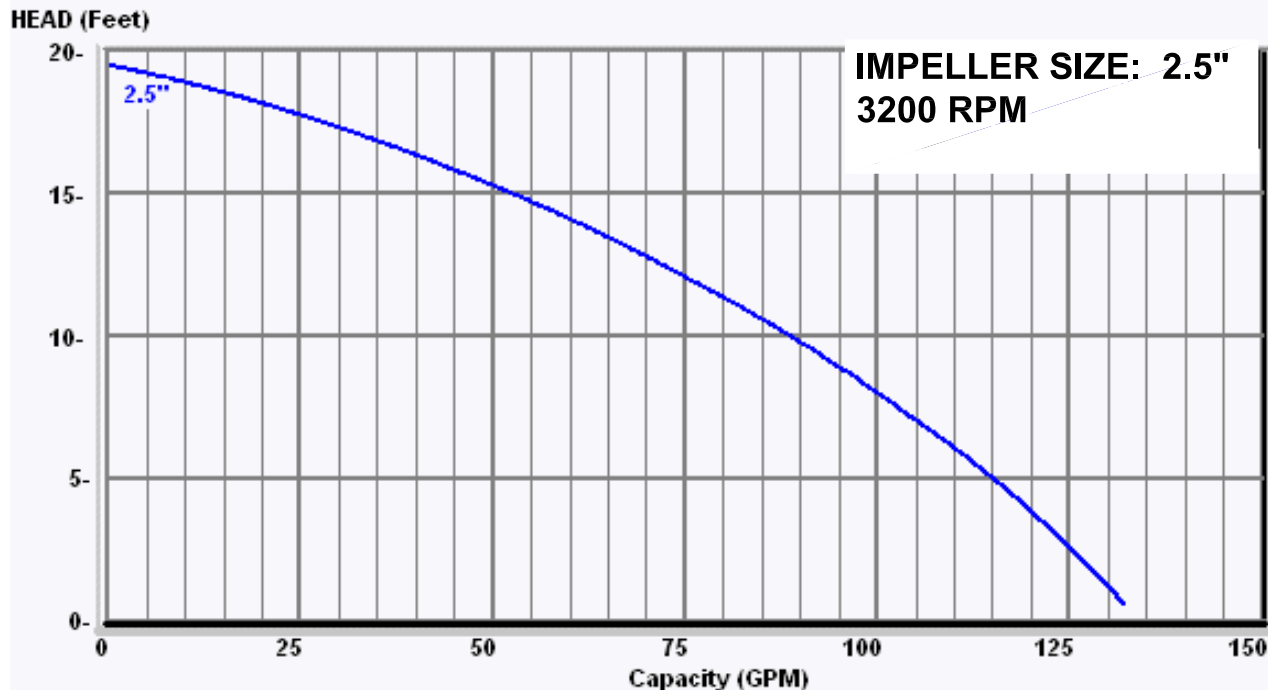

INSTALLATION OPERATING CONDITIONS	
BOILER MODEL	
BOILER LOOP FLOW	
BOILER LOOP ΔT (°F)	
BOILER LOOP PRESSURE DROP (FT. HD.)	

**NOTE:**

AERCO MODULEX PRIMARY LOOP DESIGN GUIDELINES (DOCUMENT C400.2) **MUST** BE CONSULTED TO DETERMINE THE APPLICATION FOR THIS PUMP/CIRCUIT SETTER KIT.

*AERCO* INTERNATIONAL, INC.  
NORTHVALE, NJ 07647

PUMP / CIRCUIT SETTER KIT  
99127-4

DWN. BY <u>CZ</u> DATE <u>070810</u>	AP-A-868	REV. _____
SCALE _____ SIZE _____		C
CHKD. _____ APPD. _____		
REV. DATE _____		