


HEAT EXCHANGERS & COMBUSTION CHAMBER DESIGN STANDARDS

MAX. WORKING PRESS. (PSIG)	MAXIMUM TEMP. (°F)	TEST PRESS. (PSIG)	HT'G SURFACE SQ.FT.	MIN. RELIEF VA. CAPACITY MBH
160	210	240	171	3000

ASME B & PV CODE: SECTION IV STAMP H

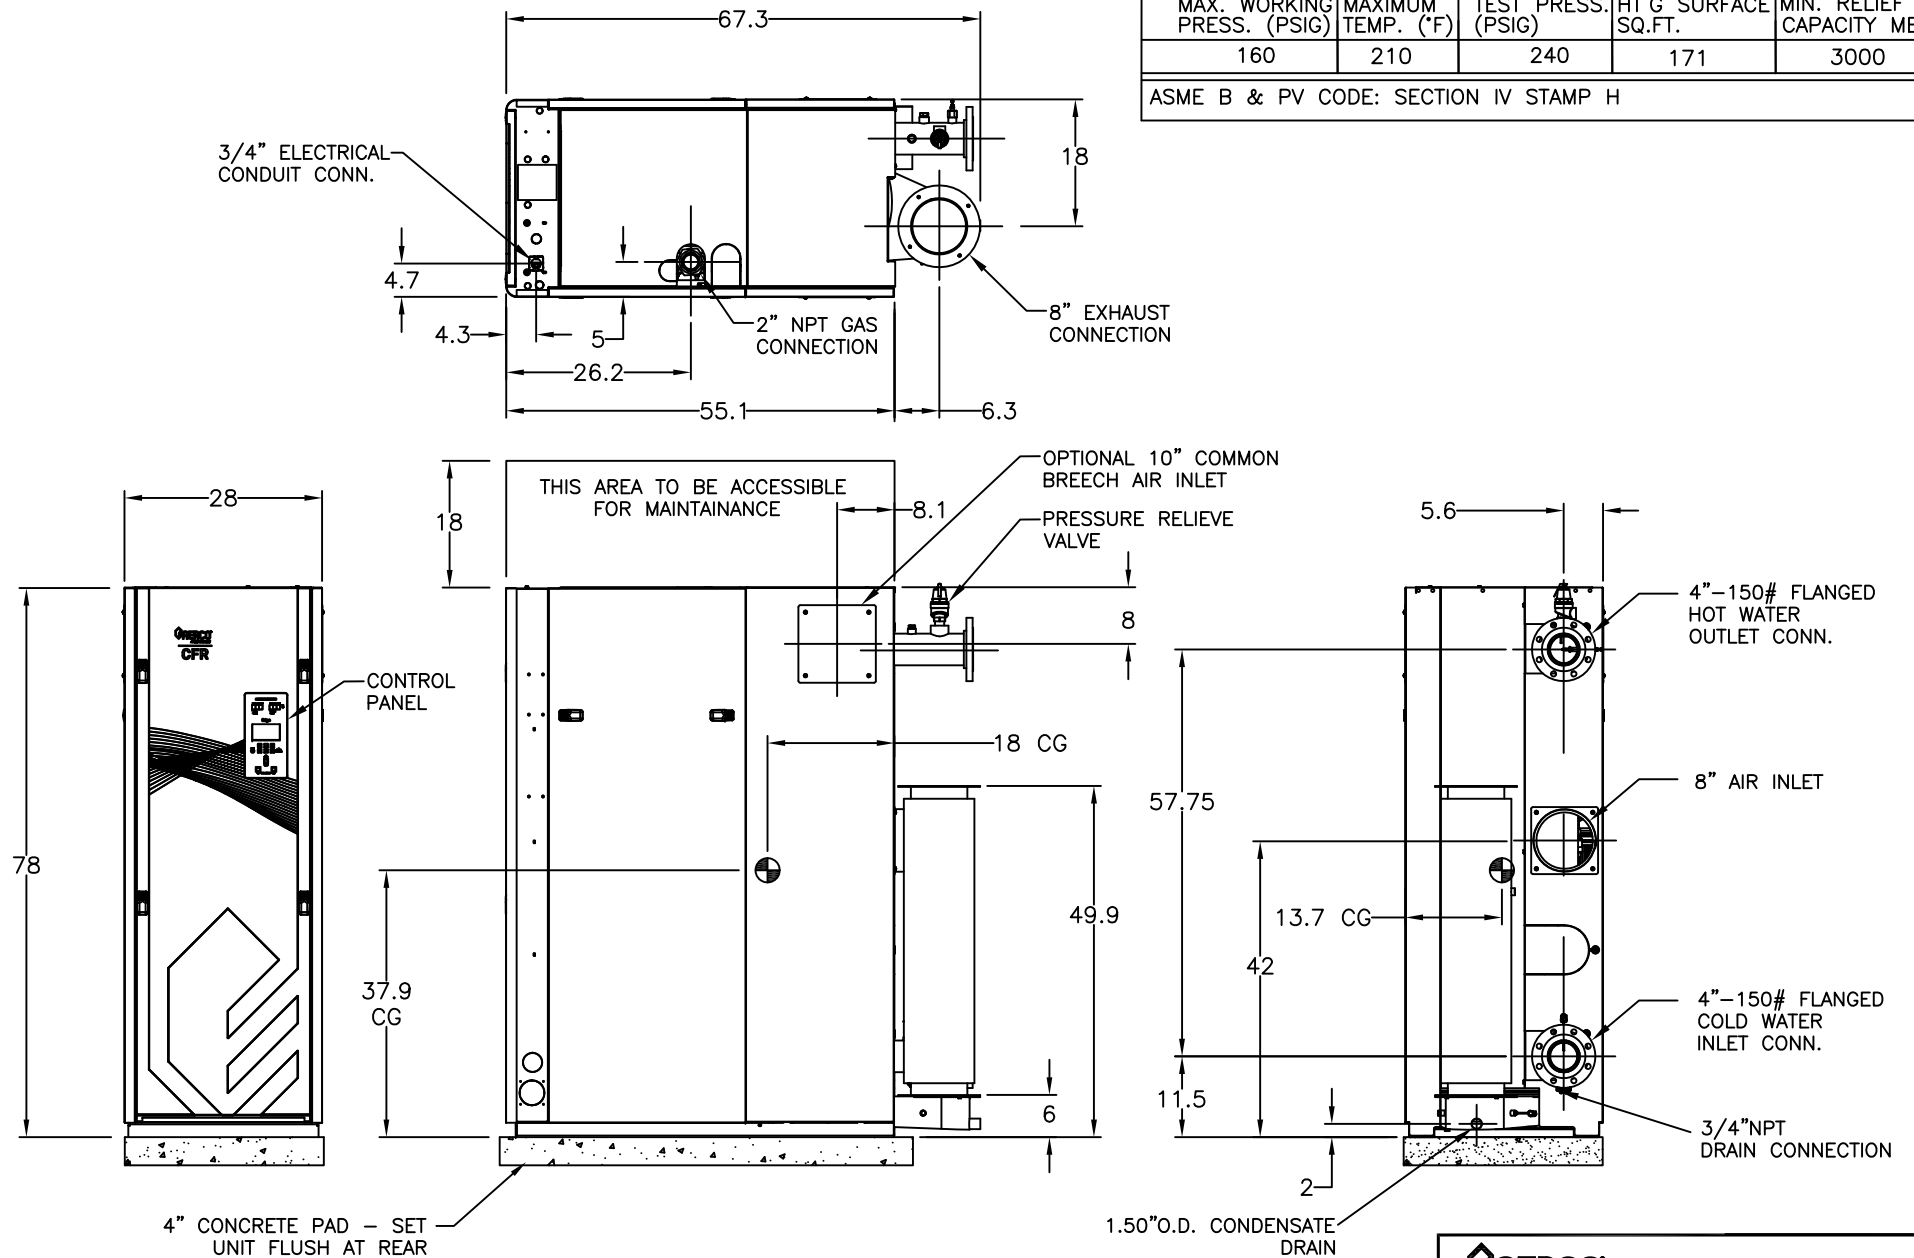

NOTES:

- 1) RELIEF VALVE, TRIDICATOR & CONDENSATE TRAP ARE INCLUDED SEPARATELY IN SHIPMENT.
- 2) AERCO RESERVES THE RIGHT TO MODIFY BOILER DIMENSIONS WITHOUT PRIOR NOTICE.



100 ORITANI DRIVE BLAUVELT, NY 10913
aerco.com

CFR 3000 MBH BOILER
DIMENSIONAL DRAWINGS

DWN.BY K.S. DATE 052223
SCALE NTS SIZE A
CHKD. _____ APPD. _____
REV.DATE _____

AP-A-1093

REV.
A