


PUMP PART NUMBER: 69234

CIRCUIT SETTER PART NUMBER: 92081-3.0

SPECIFICATIONS - B&G e-90 3AAB
 INLINE MOUNTED-CLOSE COUPLED
 FLANGE SIZE: 3"
 PUMP BODY: CAST IRON
 IMPELLER DIAM: 5.125"
 HORSEPOWER: 1
 VOLTAGE: 115V/208-230V/1PH/60HZ
 FLA: 16A (115V) / 8A (230V)
 MAX. OPERATING TEMPERATURE: 250°F
 MAX. WORKING PRESSURE: 175 PSI
 OVERALL DIMENSION: 18-1/4"H X "8D
 FLANGE FACE-TO-FACE: 12"

SPECIFICATIONS
 CONNECTION SIZE: 3" NPT
 BODY: BRASS
 MAX OPERATING TEMP.: 250°F
 MAX. WORKING PRESSURE: 300 PSI
 OVERALL DIMENSION:
 6.50"L X 5.44"H X 5.12"D

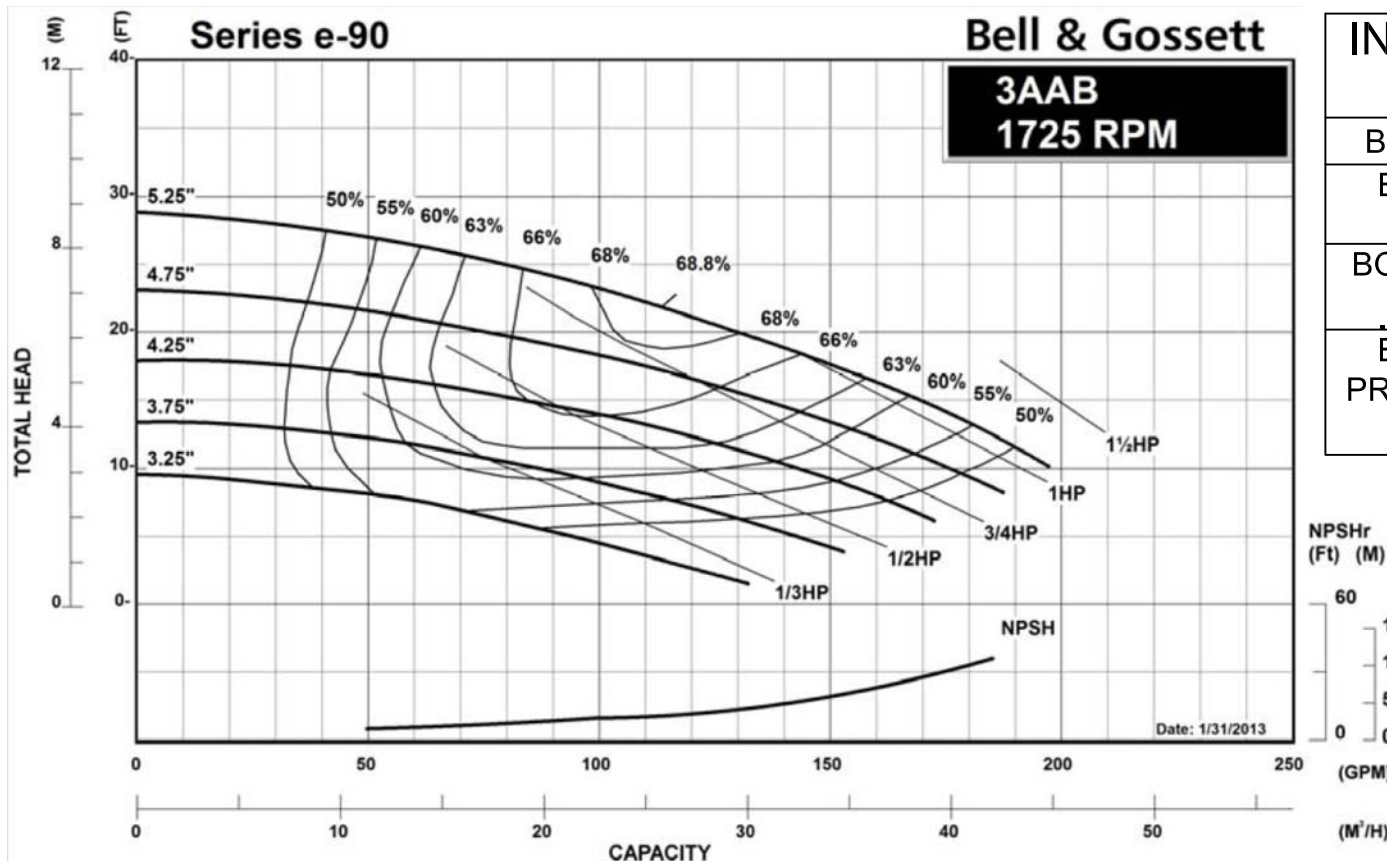

| INSTALLATION OPERATING CONDITIONS | |
|-------------------------------------|--|
| BOILER MODEL | |
| BOILER LOOP FLOW | |
| BOILER LOOP ΔT (°F) | |
| BOILER LOOP PRESSURE DROP (FT. HD.) | |

AERCO INTERNATIONAL, INC.
 NORTHVALE, NJ 07647

PUMP / CIRCUIT SETTER KIT
 99208-5

| | | |
|--------------------------------------|----------|---------------|
| DWN. BY <u>CZ</u> DATE <u>060314</u> | AP-A-968 | REV. B |
| SCALE _____ SIZE _____ | | |
| CHKD. _____ APPD. _____ | | |
| REV. DATE _____ | | |

NOTE: AERCO MODULEX PRIMARY LOOP DESIGN GUIDELINES (DOCUMENT C400.2) **MUST** BE CONSULTED TO DETERMINE THE APPLICATION FOR THIS PUMP/CIRCUIT SETTER KIT.